

mITX PSU LD 200W19VDC



Input Voltage Range: 16VDC - 24VDC

Input Current Range: 12.0A Max @19VDC

Input Surge Current: 12.0A Max @19VDC

Work Efficiency: 85% or more

Size: L 155 mm x W 35 mm x H 20 mm

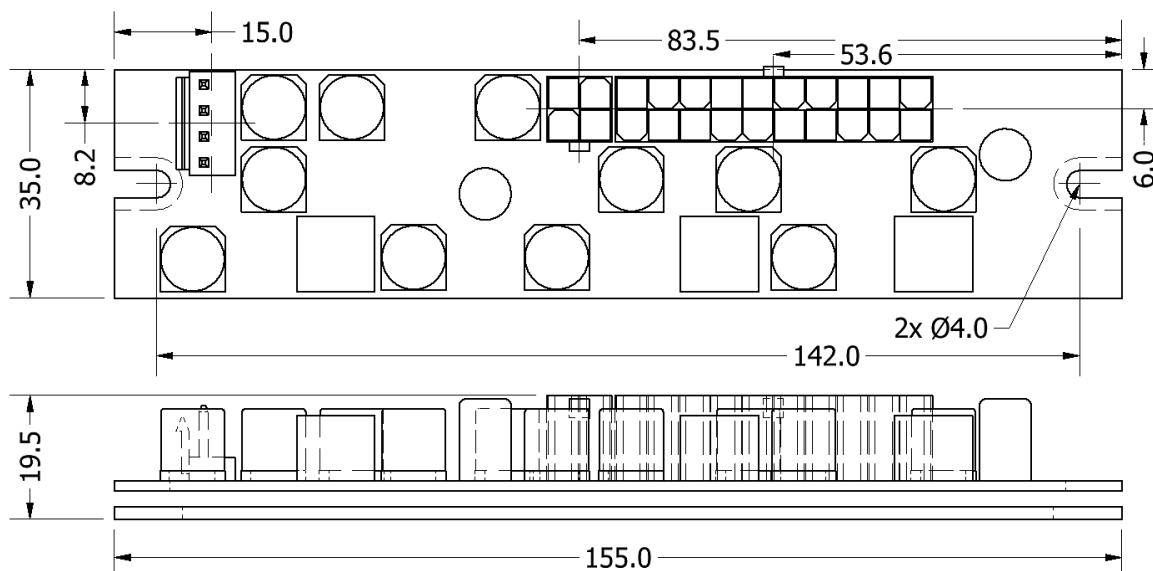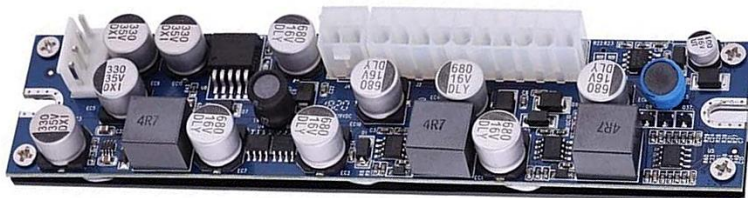

Output: (Vin=19VDC)

Rail	Min(V)	Typ(V)	Max(V)	Ripple(mV)	Standby (A)	Typ (A)	Peak (A)
+3.30V	3.14	3.3	3.47	50	0	8	10
+5.00VSB	4.75	5	5.25	50	0.1	2	2.5
+5.00V	4.75	5	5.25	50	0	6	10
+12.00V	11.4	12	12.6	120	0	6	8
-12.00V	-11.4	-12	-12.6	120	0	0.1	0.15

Protection Function:(for +3.3v, +19V, +5.00v, +5.00VSB)

Overvoltage Protection: when the output voltage reaches 1.5 times the rated voltage, the output is closed.

Short Circuit Protection: when a short circuit occurs in the output, the output is closed.

Environment Description:

Working Temperature/Humidity: 0°C to 40°C / 45% - 75%

Storage Temperature/Humidity: - 40°C to +70°C / 10% - 90%

Atmospheric Pressure: 86Kpa -- 106Kpa

Package Included:

1 x Power Module

1 x 4 pin Molex Power Supply

1 x 24pin ATX, 12V AUX, SATA Power,

4 pin Floppy Drive Power Connection, 4 pin Wire

1 x DC Input Wire

