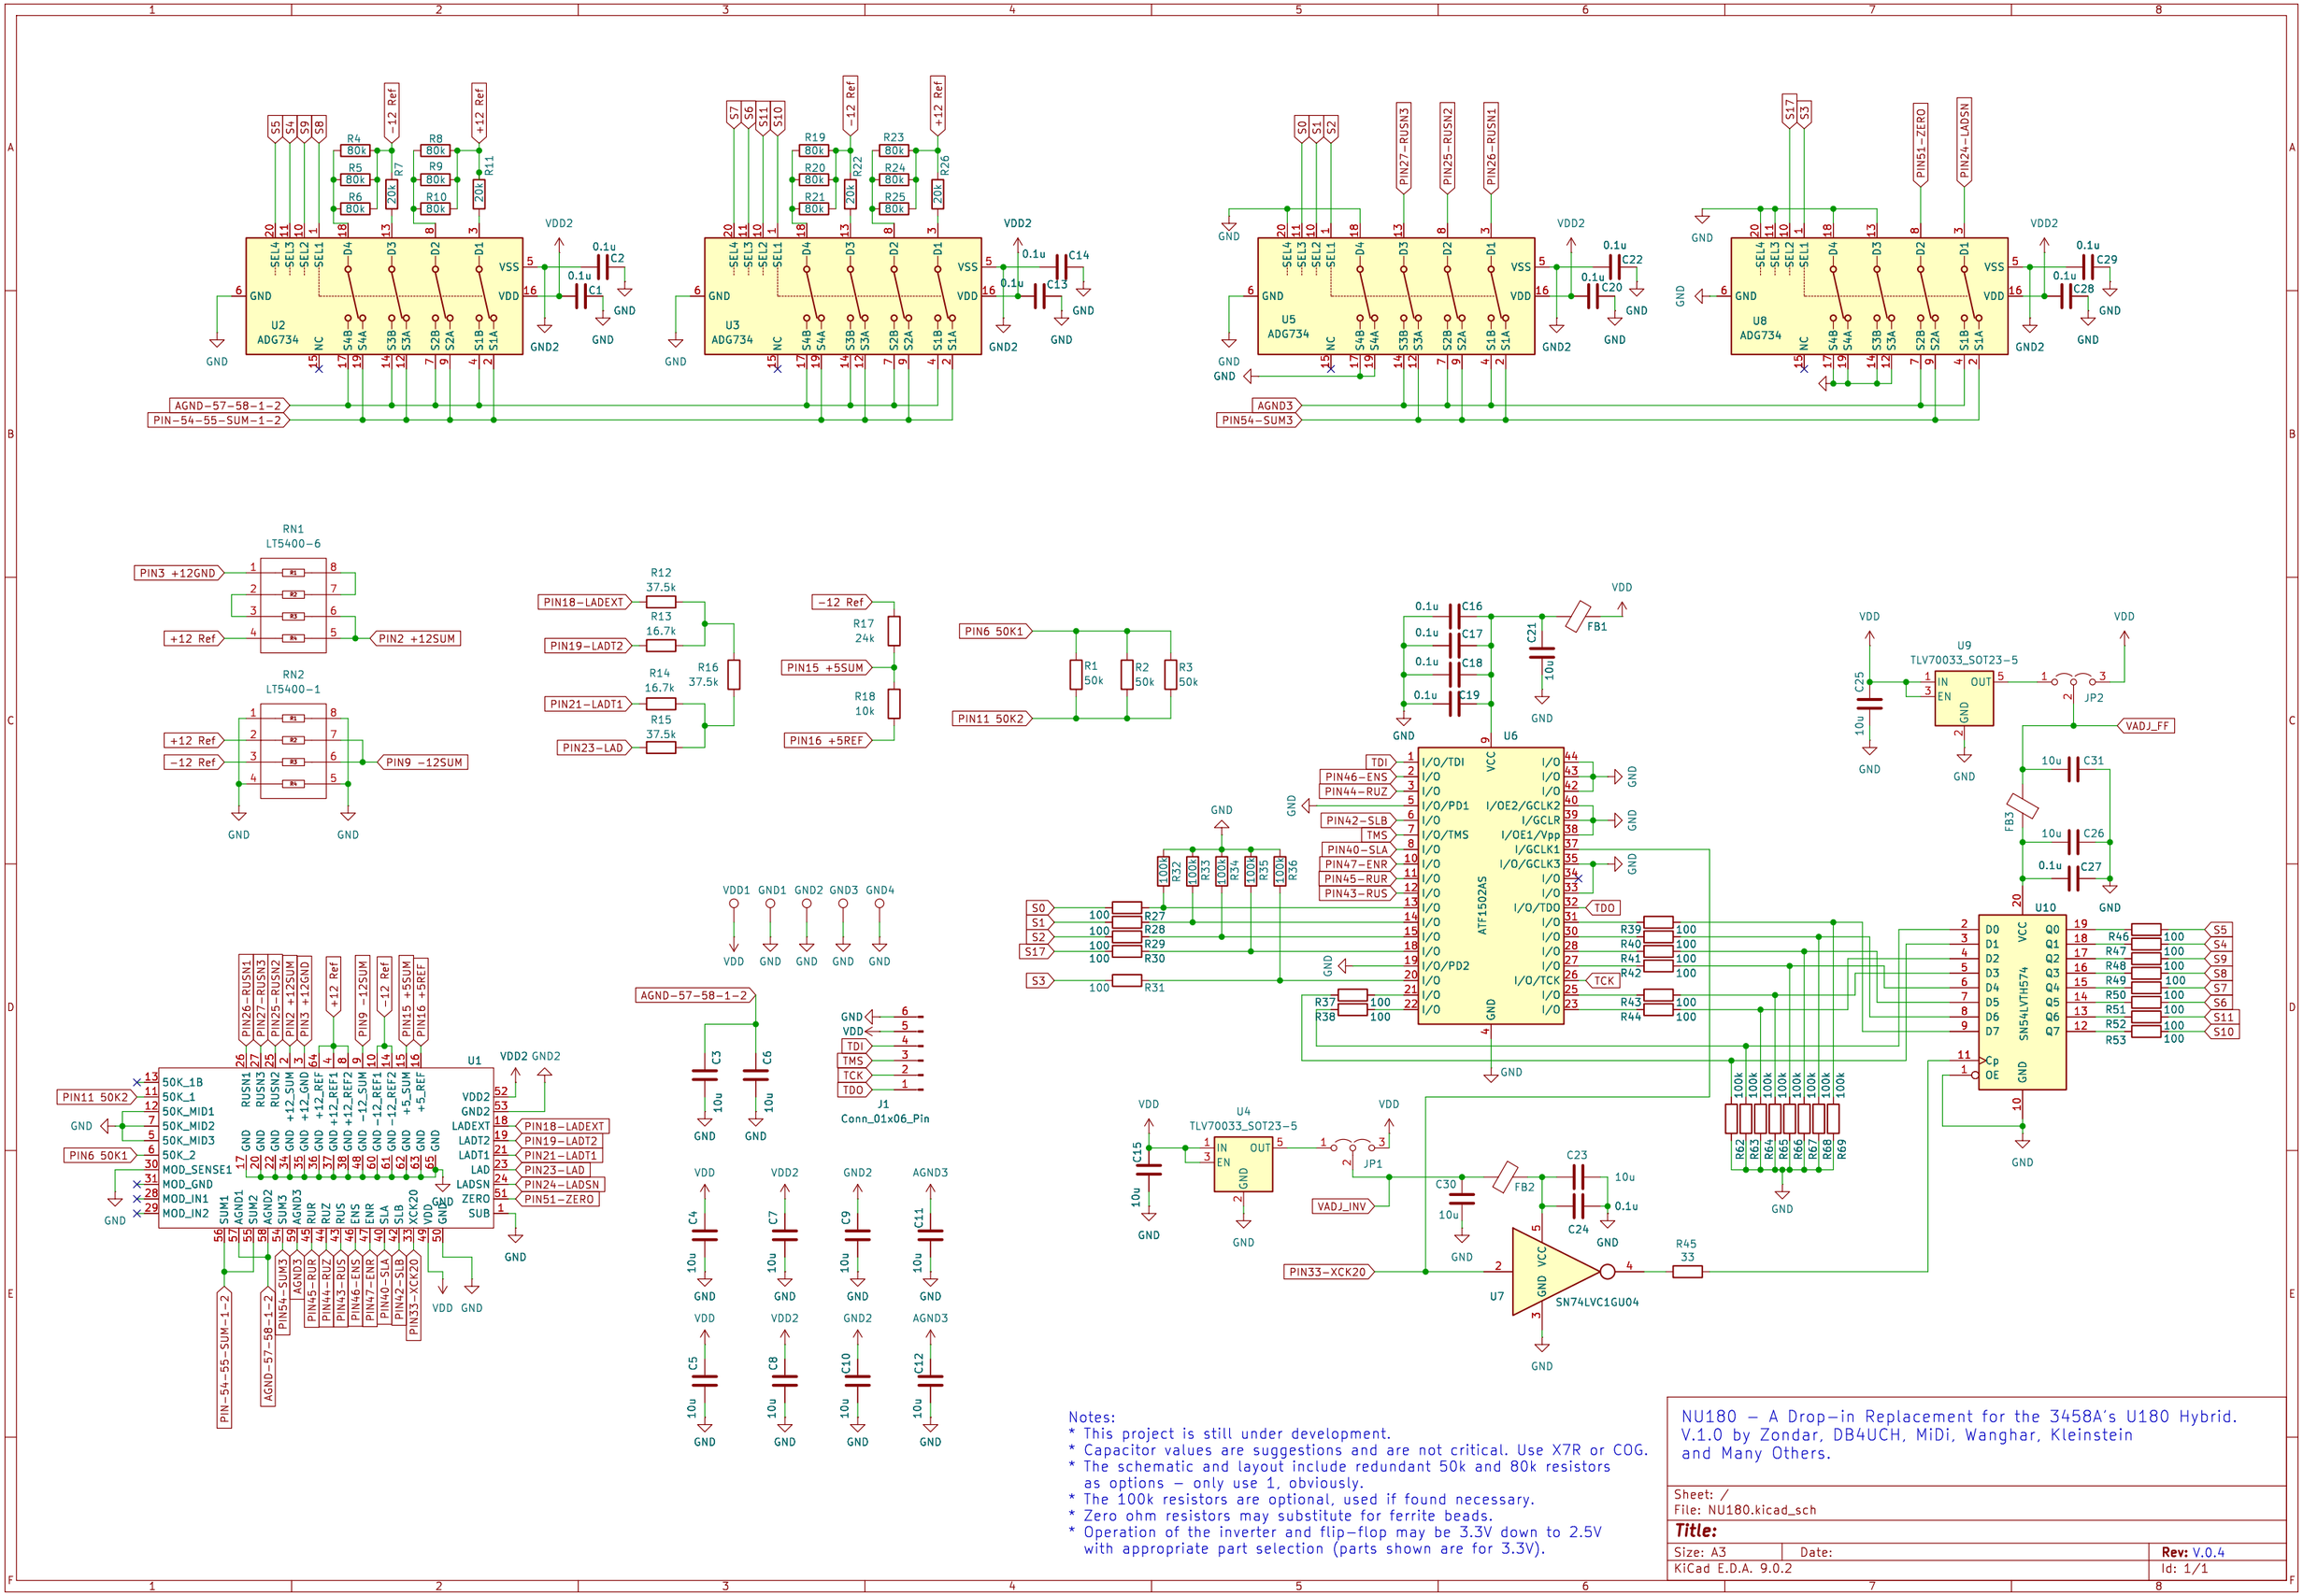

Notes:
* This project is still under development.
* Capacitor values are suggestions and are not critical. Use X7R or COG.
* The schematic and layout include redundant 50k and 80k resistors as options – only use 1, obviously.
* The 100k resistors are optional, used if found necessary.
* Zero ohm resistors may substitute for ferrite beads.
* Operation of the inverter and flip-flop may be 3.3V down to 2.5V with appropriate part selection (parts shown are for 3.3V).

NU180 – A Drop-in Replacement for the 3458A's U180 Hybrid.
V.1.0 by Zondar, DB4UCH, MiDi, Wanghar, Kleinstein and Many Others.

Sheet: /
File: NU180.kicad_sch

Title:

Size: A3	Date:	Rev: V.0.4
KiCad E.D.A. 9.0.2		Id: 1/1