


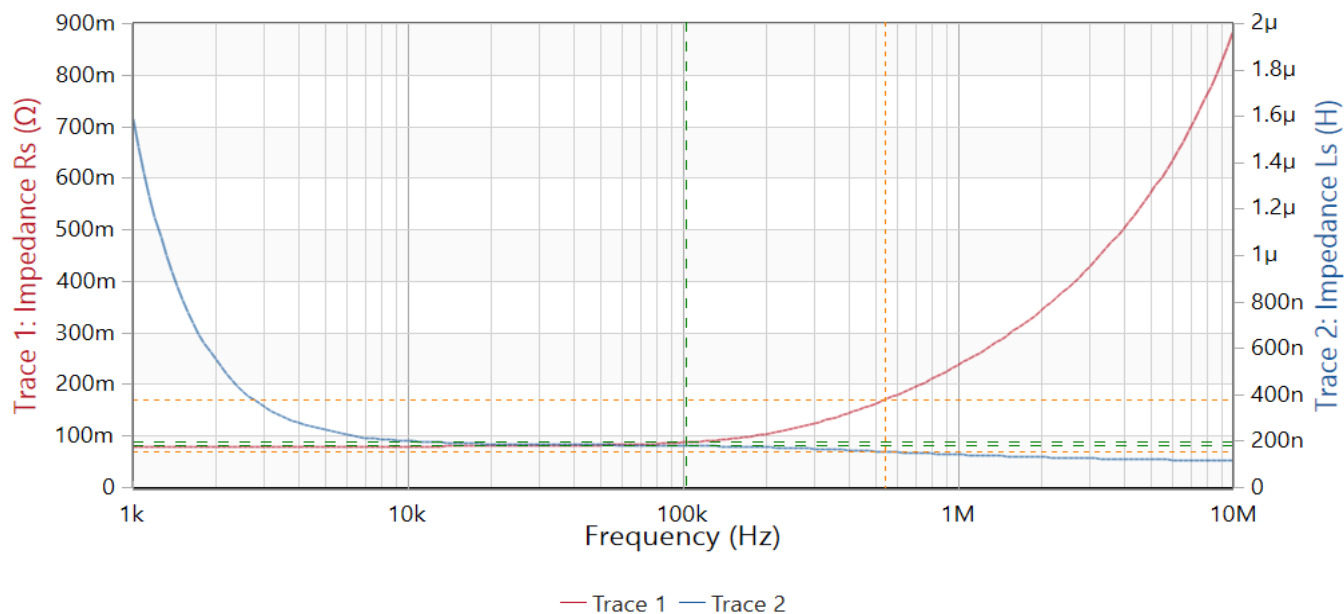

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	102.751 kHz	542.884 kHz	440.132 kHz
Trace 1	R_s	R_s	R_s
Measurement	87.772 m Ω	170.503 m Ω	82.732 m Ω
Trace 2	L_s	L_s	L_s
Measurement	179.982 nH	154.963 nH	-25.02 nH

Sweep

Start frequency:	1 kHz
Stop frequency:	10 MHz
Center frequency:	5 MHz
Span:	9.999 MHz
Sweep mode:	Logarithmic
Numer of points:	201

Calibration

	Full-Range	User-Range
Thru	-	-
O/S/L	Active	-

Attenuator setting

	Channel 1	Channel 2
Reflection	20 dB	10 dB

Hardware setup

Device type:	Bode100R2
Serial number:	SB283K
Receiver bandwidth:	100 Hz
Output level:	13 dBm
DUT settling time:	0 ms