


Measurement: Shunt-Thru

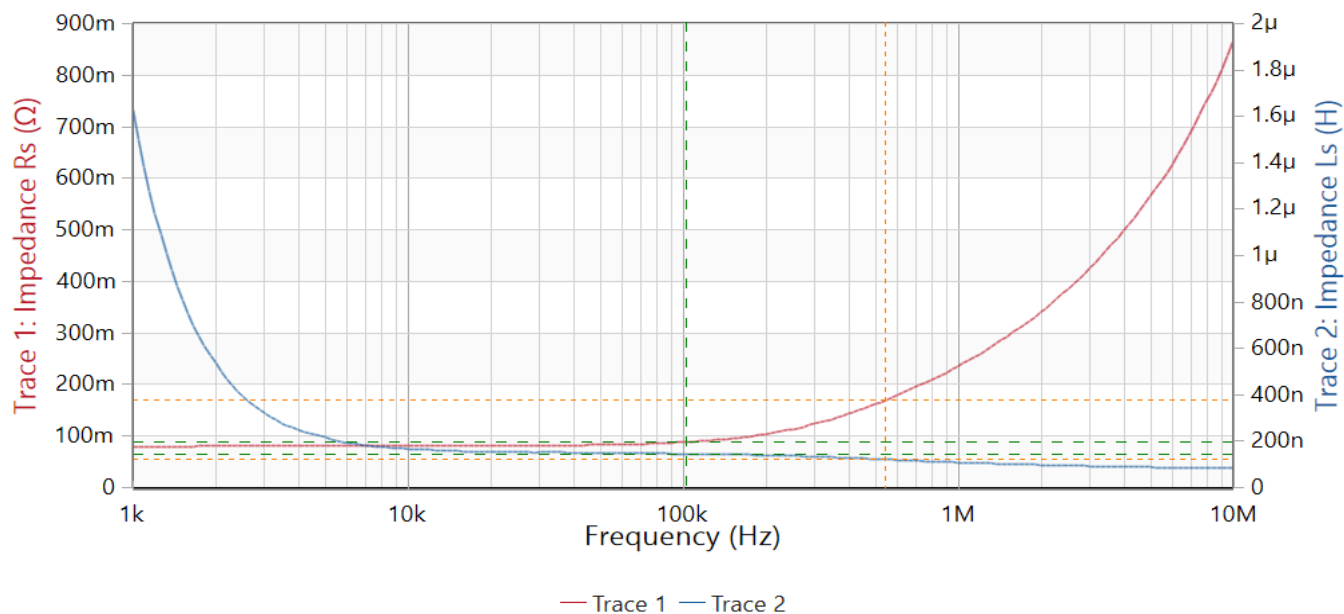

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	102.751 kHz	542.884 kHz	440.132 kHz
Trace 1	R_s	R_s	R_s
Measurement	88.317 m Ω	168.911 m Ω	80.594 m Ω
Trace 2	L_s	L_s	L_s
Measurement	145.456 nH	121.492 nH	-23.964 nH

Sweep	
Start frequency:	1 kHz
Stop frequency:	10 MHz
Center frequency:	5 MHz
Span:	9.999 MHz
Sweep mode:	Logarithmic
Numer of points:	201

Calibration	Full-Range	User-Range
Thru	-	-
O/S/L	Active	-

Attenuator setting	Channel 1	Channel 2
Reflection	20 dB	10 dB

Hardware setup	
Device type:	Bode100R2
Serial number:	SB283K
Receiver bandwidth:	100 Hz
Output level:	13 dBm
DUT settling time:	0 ms