


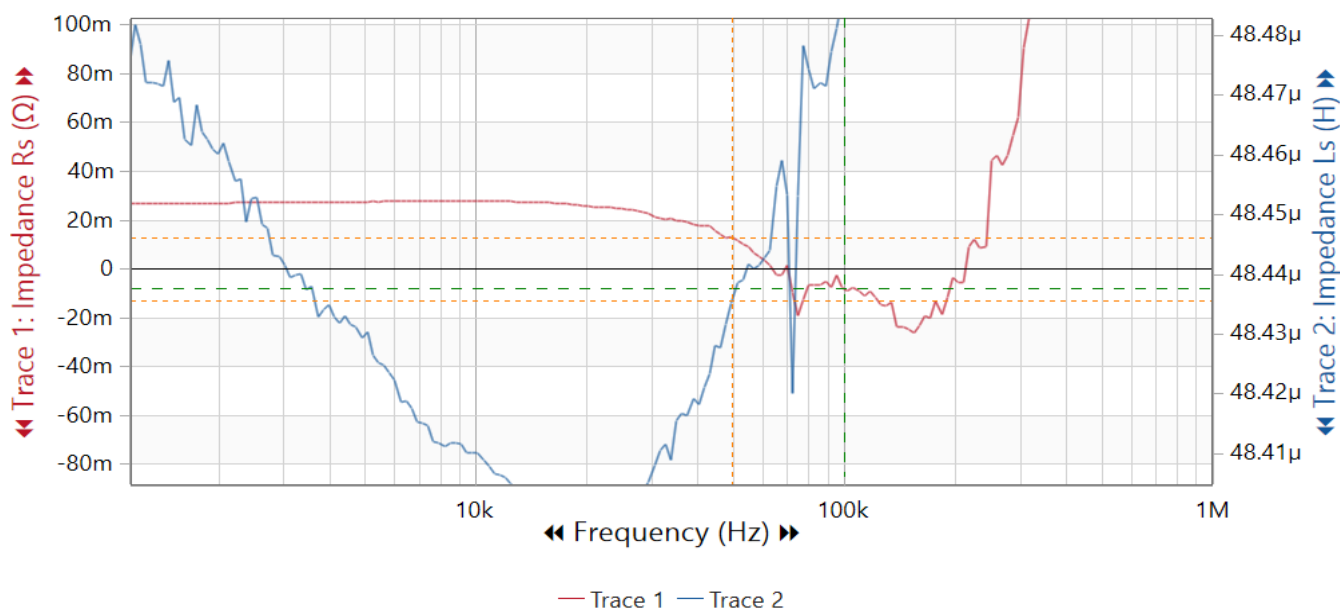

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	100 kHz	49.726 kHz	-50.274 kHz
Trace 1	R_s	R_s	R_s
Measurement	-8.031 m Ω	12.822 m Ω	20.853 m Ω
Trace 2	L_s	L_s	L_s
Measurement	48.489 μ H	48.436 μ H	-53.177 nH

Sweep

Start frequency:	1 kHz
Stop frequency:	1 MHz
Center frequency:	500.5 kHz
Span:	999 kHz
Sweep mode:	Logarithmic
Numer of points:	201

Calibration

	Full-Range	User-Range
Thru	-	-
O/S/L	Active	-

Attenuator setting

	Channel 1	Channel 2
Reflection	20 dB	20 dB

Hardware setup

Device type:	Bode100R2
Serial number:	SB283K
Receiver bandwidth:	100 Hz
Output level:	2 dBm
DUT settling time:	0 ms