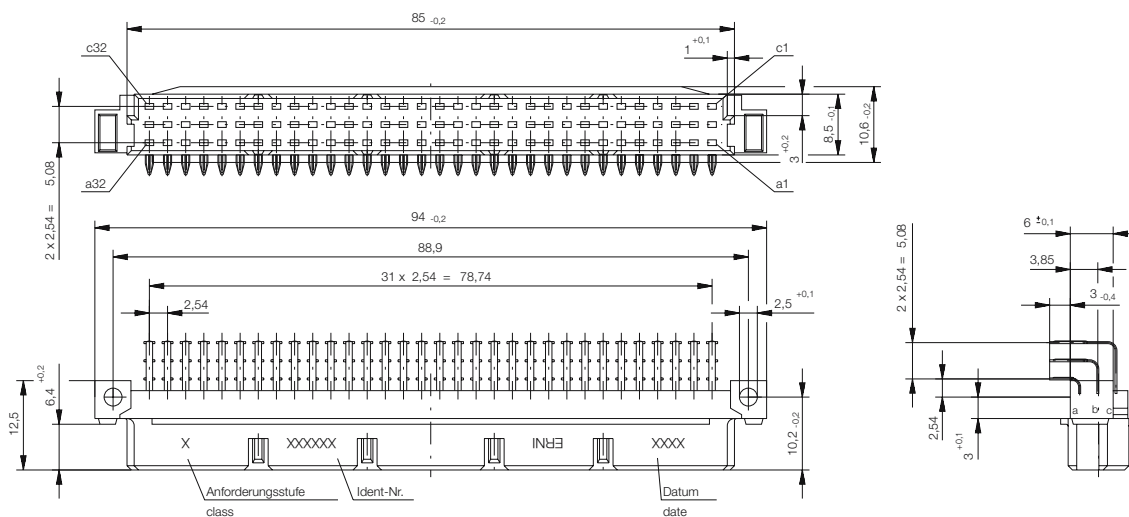


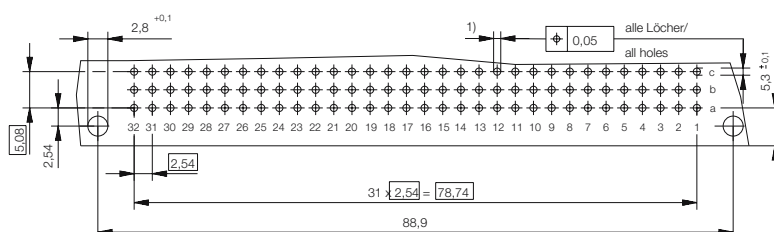
DIN 41612 / IEC 60603-2 Connectors Type R Female



Dimensional Drawing Pressfit

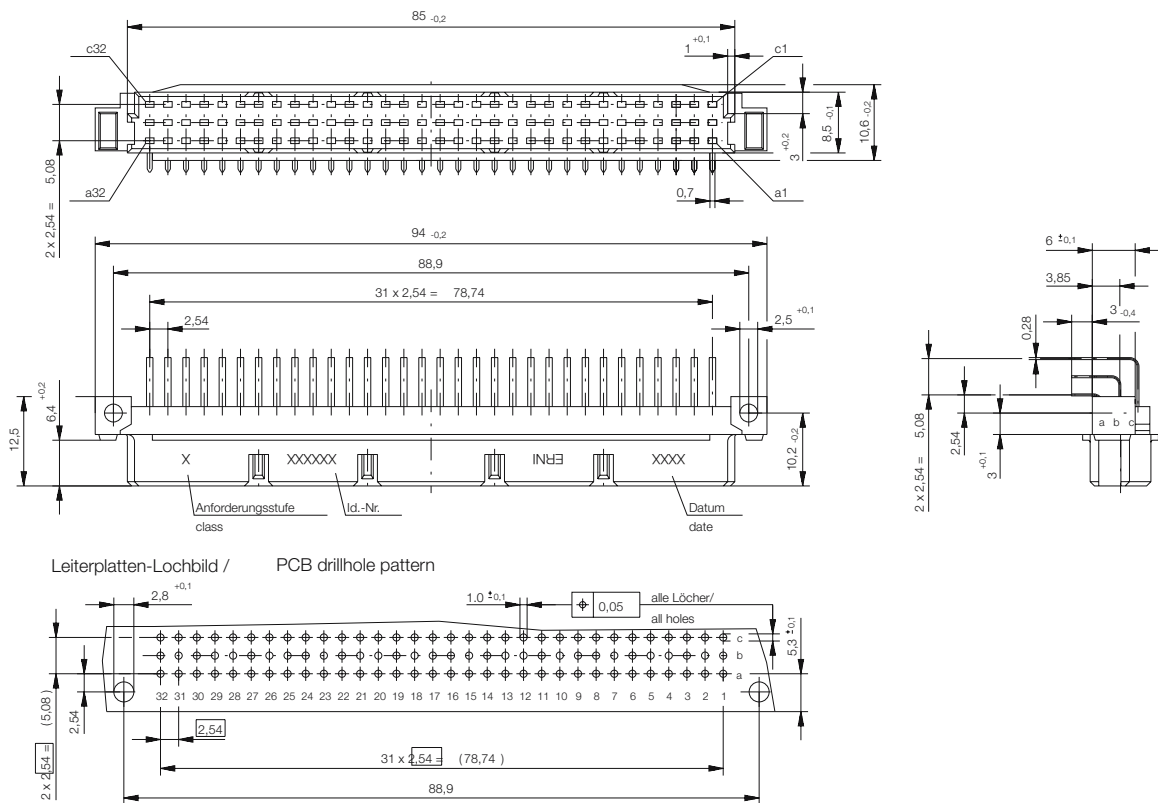


Leiterplatten-Lochbild / PCB drillhole pattern

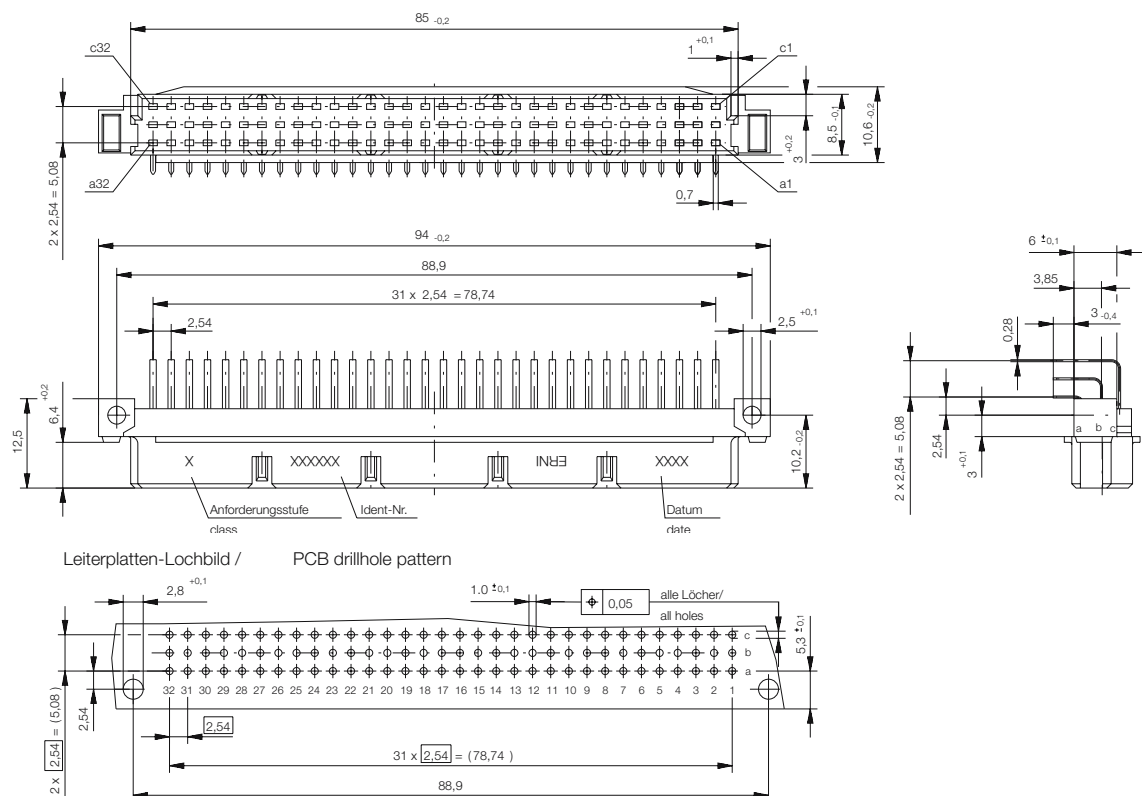


- Ø 1,0^{+0,09} Durchmesser des metallisierten Loches
- Ø 1,0^{+0,09} Diameter of finished plated-through hole
- Ø 1,15^{±0,025} Bohrungsdurchmesser des Loches
- Ø 1,15^{±0,025} Diameter of drilled hole

Dimensional Drawing Solder



Dimensional Drawing THR


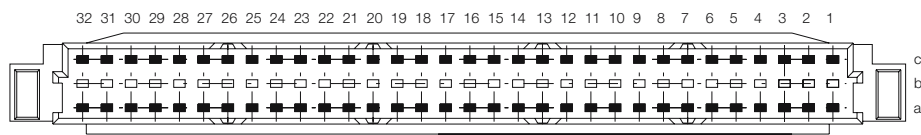

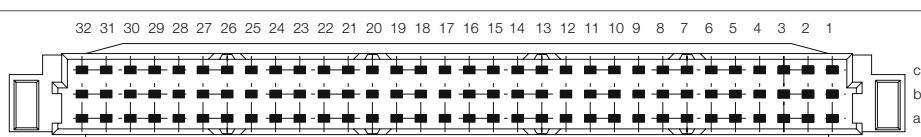

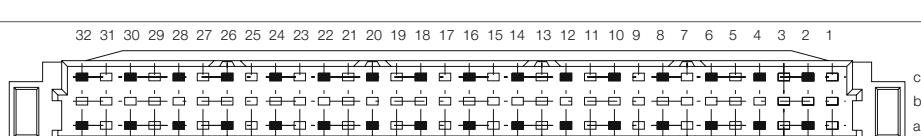

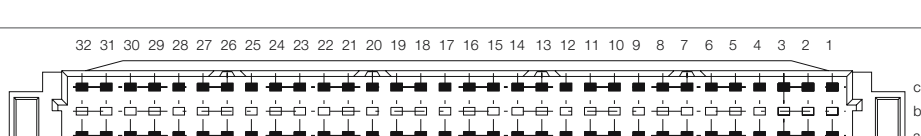

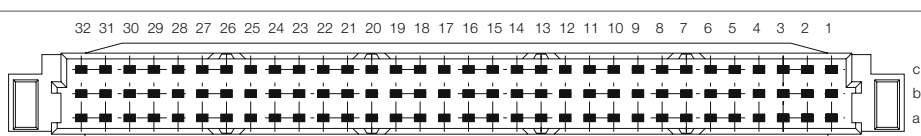


DIN 41612 / IEC 60603-2 Connectors

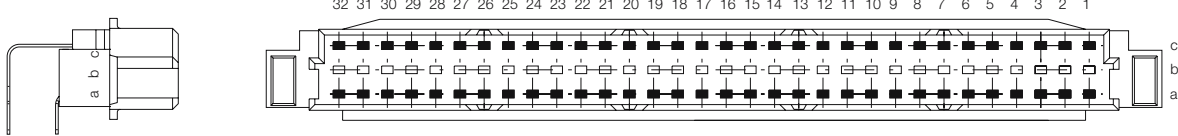
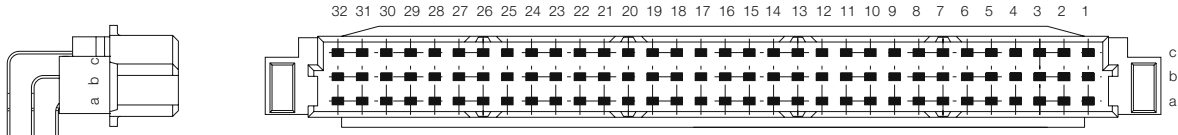
Type R Female



Ordering Information

No. of Pins	Termination	Term. Length	Pin Dimensions	Class	Pressfit Zone	Part Number
	Pressfit	3 mm		2	1 mm	023093
	Pressfit	3 mm		2	1 mm	013952
	Solder	3 mm		2	—	023039
	Solder	3 mm		2	—	004519
64	Solder with Clip	3 mm	0.28 x 0.7 mm	2	—	023503
	Solder	3 mm		1	—	004515
96	Solder	3 mm	0.28 x 0.7 mm	2	—	004516
96	Solder with Clip	3 mm	0.28 x 0.7 mm	2	—	023784

Ordering Information

No. of Pins	Termination	Term. Length	Pin Dimensions	Class	Pressfit Zone	Part Number
						
64	THR	3 mm	0.28 x 0.7 mm	2	—	194577
64	THR with Clip	3 mm	0.28 x 0.7 mm	2	—	194579
						
96	THR	3 mm	0.28 x 0.7 mm	2	—	154962
96	THR with Clip	3 mm	0.28 x 0.7 mm	2	—	154963